


DN10/15 - 50




Ball valve type 546 PVC-U
With mounting inserts
With solvent cement sockets metric

Model:


- For easy installation and removal
- Ball seals PTFE
- Integrated stainless steel mounting inserts
- z-dimension, valve end and union nut are **not compatible** with type 346 (DN10/15-50) resp. type 370 (DN65-100)

Option:

- Individual configuration of the valve (see diagram)
- Multifunctional module with integrated limit switches
- Pneumatic or electric actuators from +GF+



d	Size	DN	PN	kv-value	EPDM	SP	Weight	FPM	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
				(l/min)						
16		10	16	71	161 546 061	1	0.153	161 546 071	1	0.156
20		15	16	185	161 546 062	1	0.156	161 546 072	1	0.158
25		20	16	350	161 546 063	1	0.240	161 546 073	1	0.242
32		25	16	700	161 546 064	1	0.343	161 546 074	1	0.345
40		32	16	1000	161 546 065	1	0.610	161 546 075	1	0.615
50		40	16	1600	161 546 066	1	0.838	161 546 076	1	0.844
63		50	16	3100	161 546 067	1	1.537	161 546 077	1	1.552
75	2 1/2	65	16	5000	161 546 068	1	4.343	161 546 078	1	3.563
90		80	16	7000	161 546 069	1	6.184	161 546 079	1	5.376
110		100	16	11000	161 546 070	1	8.642	161 546 080	1	11.600

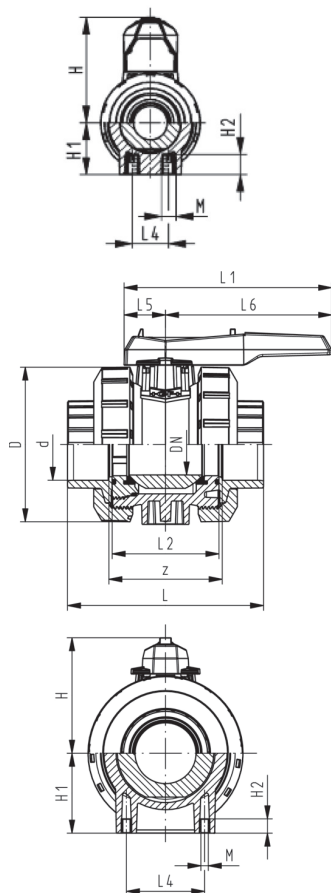

d	D	H	H1	H2	L	L1	L2	L4	L5	L6	M	z	closest
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	inch
													(inch)
16	50	57	27	12	92	77	56	25	32	45	6	64	3/8
20	50	57	27	12	95	77	56	25	32	45	6	64	1/2
25	58	67	30	12	110	97	65	25	39	58	6	72	3/4
32	68	73	36	12	123	97	71	25	39	58	6	79	1
40	84	90	44	15	146	128	85	45	54	74	8	94	1 1/4
50	97	97	51	15	157	128	89	45	54	74	8	95	1 1/2
63	124	116	64	15	183	152	101	45	66	87	8	107	2
75	166	149	85	15	233	270	136	70	64	206	8	144	2 1/2
90	200	161	105	15	254	270	141	70	64	206	8	151	3
110	238	178	123	22	301	320	164	120	64	256	12	174	4